

UVACUBE 400



UVACUBE 400

UV curing chamber

FEATURES

- shutter
- user-friendly
- different spectra

BENEFITS

- homogenous irradiation
- high operational safety

www.techsil.co.uk





UVACUBE 400

The UVACUBE 400 is an economical UV curing chamber for laboratory use and manufacture by hand. Due to various lamp/filter combinations, the spectra can be easily adapted for a large variety of applications. UVACUBE 400 has a manually operated shutter and meets the highest demands in operational safety and ease of handling.

RANGE OF APPLICATIONS

- Curing of adhesives and plastics
- Curing of inks, varnishes and coatings
- UV irradiation for chemical and biological applications

AVAILABLE SPECTRA

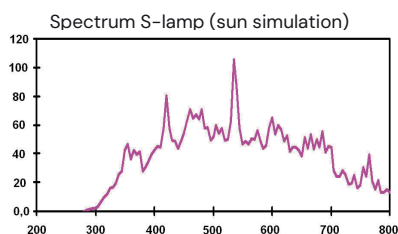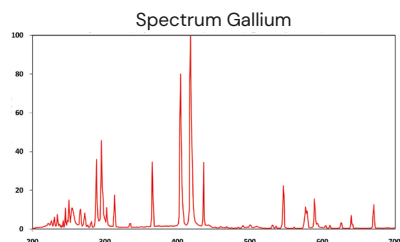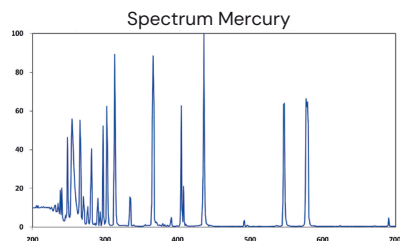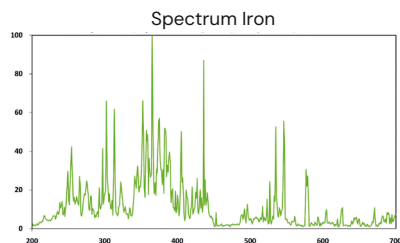

GENEROUS CAPACITY

UVACUBE 400 has a useful working capacity of around 450 x 400 x 300 mm (HxWxD) permitting a wide range of objects to be accommodated. Optimised lamp reflectors and interior provide uniform irradiation (approx. +/- 10 % on bottom of chamber).

MULTIFUNCTIONAL

Hoenle UV lamps offer outstanding power yield with long lamp life. With an electrical input of the lamp of 400 W the lamp has four different spectra available: iron, gallium, mercury and sun-light simulation.

TECHNICAL DATA

- Supply voltage: 230 V / 50 Hz
- Power input: 400 W
- Irradiation area: max. 400 x 300 mm
- Dimensions (LxWxD)*: 834 x 466 x 402 mm

SAFETY OF OPERATION

Safety of operation is provided through interlocking. The door is locked when the shutter is open and the shutter is locked when the door is open.

Hoenle AG
Nicolaus-Otto-Str. 2
82205 Gilching
Germany

Phone: +49 8105 2083-0
curing@hoenle.com

www.hoenle.com

www.techsil.co.uk



Operating parameters depend on production characteristics and may differ from the foregoing information. We reserve the right to modify technical data. © Copyright Hoenle AG. Updated 09/25