






OUTDOOR METAL PROTECTANT



LU™ 777

	For use in medium pressure applications
	Protectant Longevity: Heavy 24 months
	NSF® Registered; H2 Rated (Lubricants with no contact) (Reg. No. 127500)
	Minimum - Maximum operational temperature range: Low -20 °F (-29 °C) • High 300 °F (149 °C)
	Flash Point: 121 °F (49 °C)
	Dielectric Strength: 30,600 volts
	HMIS Hazard Rating: Health (2) • Flammability (4) • Reactivity (0)

- Prevents rust/displaces moisture/penetrates
- Protects from salt water
- 24 Month durability
- Meets MIL-C-16173D- Grade 2



PRESERVE. PROTECT. PREVENT.™

Sprayon® LU™ 777 Outdoor Metal Protectant is a formulated waxy corrosion preventative compound that offers excellent lubrication and long term outdoor protection. This waxy, somewhat tacky protectant and lubricant provides more than 2,000 hours salt spray protection. LU™ 777 Outdoor Metal Protectant is ideal for general rust proofing of vehicles, both underbody/chassis and inner body cavities. This product works on all metals, rubber, plastic and painted surfaces and is an excellent barrier in high humidity environments.

LUBRICANTS

USES

- Railroad equipment
- Sheet steel
- Weapons
- Dies
- Oil field equipment
- Castings
- Locks
- Molds
- Tools
- Aircraft parts
- Threads
- Machine tools
- Gears
- Hinges
- Storage tanks & containers
- Military equipment
- Industrial parts & machines
- Body & frames of vehicles & machines



LU777

© 2010 Sprayon® Products Made in U.S.A.

APPLICATION

Maximum performance is achieved when the metal surfaces to be protected are clean, dry and free of rust, oil and mill scale. Product should be sprayed in a well ventilated area. Sprays best at room temperature. Shake well before using. Spray at a distance of 10" to 12" from surface.

PERFORMANCE

DIELECTRIC STRENGTH: 30,600 volts

PLASTIC SAFE: Yes

TEMPERATURE RANGE:

LOW: -20°F

HIGH: 300°F

LOAD CAPACITY: Medium

GOVERNMENT SPECIFICATIONS: This product meets the requirements of MIL-C-16173D grade 2, MIL-C-23411A, MIL-C-0083933A, and MIL-C-62218A.

- NSF Reg. No. 127500; H2 Rated
- Penetrant
- Water-Displacer
- Rust Inhibitor

PROPERTIES

APPEARANCE: Viscous amber

ODOR: Mild Solvent

PROPELLANT: CO₂

WT./GAL.: 7.09

SPECIFIC GRAVITY: 0.85

PAINTABLE: No

H.A.P.S. (HAZARDOUS AIR POLLUTANTS): No

SARA 313 CHEMICALS: No

% VOC AEROSOL: 59.60%

V.O.C. COMPLIANT CALIFORNIA: Yes

V.O.C. COMPLIANT OTC STATES: Yes

FLAMMABLE: Yes

FLASH POINT: 121°F

HAZARD RATING: 2,4,0

SHELF LIFE: 3 years from date of manufacture

RESOURCES

MSDS/EDS/PRODUCT DATA SHEETS:

sprayon.com

CUSTOMER SERVICE:

1-800-777-2966

TECHNICAL INFORMATION:

1-800-251-2486

PACKAGING

Stock #: S00777

UPC Code: 0-75577-90777-9

Fill Wt.: 11 oz.


Per Case: 12

Carton Dimensions:

L 11.13" x W 8.44" x H 8.38"

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

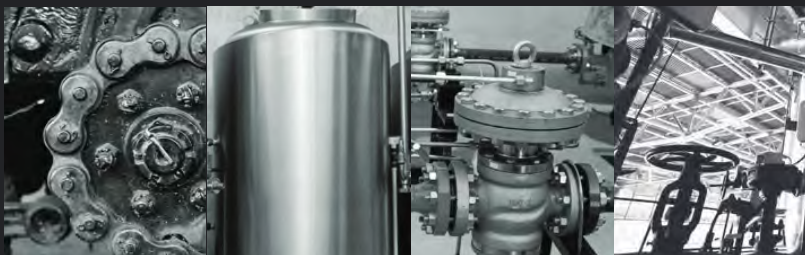

Distributed by:

PRESERVE. PROTECT. PREVENT.



Sprayon® Products

101 Prospect Ave. NW

Cleveland, OH 44115

Sprayon.com

1-800-777-2966

310-PDS-LU777

www.techsil.co.uk